


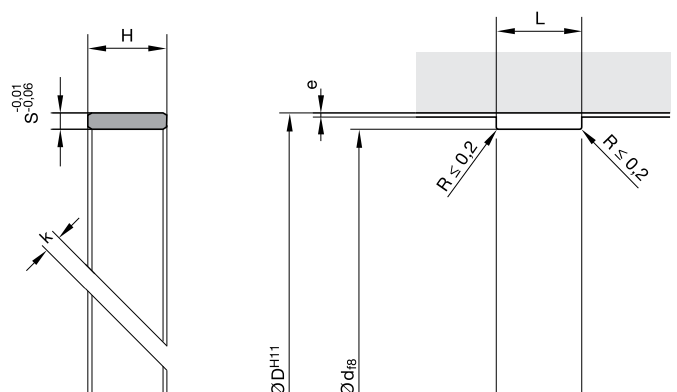

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Housing dimensions

Series no.	Guiding tape S (mm)	L (mm)	Groove		
			H (mm)	d (mm)	e (mm)
15040	1.55	4 +0.1	3.9 -0.15	D - 3.1	0.25
15050	1.55	5 +0.1	4.9 -0.15	D - 3.1	0.25
15080	1.55	8 +0.1	7.8 -0.20	D - 3.1	0.25
15090	1.55	9 +0.1	8.8 -0.20	D - 3.1	0.25
15100	1.55	10 +0.1	9.8 -0.20	D - 3.1	0.25
15120	1.55	12 +0.1	11.8 -0.20	D - 3.1	0.25
15130	1.55	13 +0.1	12.8 -0.20	D - 3.1	0.35
15150	1.55	15 +0.1	14.8 -0.20	D - 3.1	0.35
15200	1.55	20 +0.1	19.5 -0.40	D - 3.1	0.35
15250	1.55	25 +0.1	24.5 -0.40	D - 3.1	0.35

Ordering example

Mating surface aluminium
Piston diameter 32 mm
Groove 1,5 × 4 mm

a) by the metre F2 0000 033 15040 A (4 × 1.5)
F2 Profile
0000 -
PS033 Compound
15040 Series no.
A Type of cut (45°)

b) cut to length F2 0320 033 15040 A (4 × 1.5 × 94)
F2 Profile
0320 Piston diameter × 10
PS033 Compound
15040 Series no.
A Type of cut (45°)